
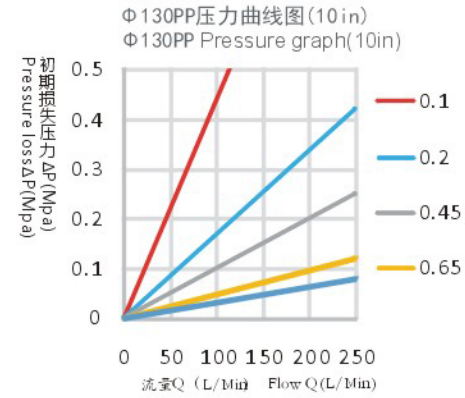


大流量折叠滤芯 High flow folding Cartridge

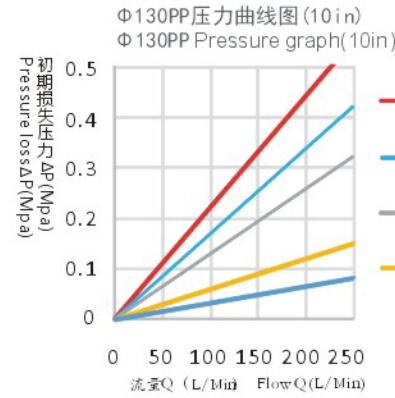

滤材：根据需要使用选择
尺寸：外径Φ83mm/Φ130mm,内径Φ40mm/Φ63mm,长度5-40in
最高工作温度：80°C
最大压差：0.42Mpa/25°C,0.10Mpa/80°C
过滤面积：Φ83mm-10in-1.0m²,Φ130mm-10in-2.0m²
灭菌：121±2°C 30min/次或灭菌柜灭菌30min/次
过滤精度(μm)：0.10,0.20,0.45,1.0,3.0,5.0
接口形式：双密封圈和单密封圈

Filter material: selected according to use needs
Size:Outer diameterΦ83mm/Φ130mm, InneΦ40mm/Φ63mm, Length5-40in
Maximum operating temperature:80°C
Maximum pressure difference: 0.42Mpa/25°C,0.10Mpa/80°C
Filter area:Φ83mm-10in-1.0m²,Φ130mm-10in-2.0m²
Sterilization: 121 ± 2 °C 30min/time or sterilization cabinet 30min / time
Filter accuracy (um):0.10,0.20,0.45,1.0,3.0,5.0
Interface form:Double seals and single seals

绕线滤芯 Wire-Winding Filter



滤材：聚丙烯线、脱脂棉线或玻璃纤维线
尺寸：外径Φ60mm-Φ130mm,内径Φ28mm、Φ30mm,长度10-40in
最高工作温度：正常工作温度50°C,最高工作温度80°C
最大压差：ΔP≤0.1Mpa
灭菌：75°C 30min/次或灭菌柜灭菌30min/次
PH值：1-13
过滤精度(μm)：1.0-100
接口形式：220,222/翅,226/翅

Filter material: Polypropylene, skimmed or fiberglass
Size:Outer diameterΦ60mm-Φ130mm, InnerΦ28mm、Φ30mm, Length10-40in
Maximum operating temperature:Normal operating temperature of 50°C, Maximum operating temperature80°C
Maximum pressure difference: ΔP≤0.1Mpa
Sterilization: 75 °C 30min/time or sterilization cabinet 30min / time
Filter accuracy (um):1.0-100
Interface form:220,222/ fin type,226/ fin type

液体过滤净化产品 Liquid filters



活性炭纤维滤芯 Activated carbon filter

滤材：活性炭纤维
尺寸：外径Φ68mm,内径Φ33mm,长度10-40in
最高工作温度：正常工作温度≤50°C,最高工作温度65°C
最大压差：0.42Mpa/25°C,0.10Mpa/65°C
PH值：1-13
过滤精度(μm)：5.0
接口形式：220,222/翅,226/翅
过滤面积：0.50m²/10in

Filter material: activated carbon fiber
Size:Outer diameterΦ68mm, InneΦ33mm,Length10-40in
Maximum operating temperature:Normal operating temperature of 50°C, Maximum operating temperature80°C
Maximum pressure difference:0.42Mpa/25°C,0.10Mpa/65°C
Filter accuracy (um):5.0Interface form:220,222/ fin type, 226/ fin type Filter area:0.50m²/10in



不锈钢折叠滤芯 Stainless steel folding Cartridge

滤材：304和316L不锈钢网
尺寸：外径Φ60mm-Φ130mm,内径Φ28mm,长度10-40in
最高工作温度：最高工作温度200°C
最大压差：ΔP≤0.6Mpa
PH值：1-14
过滤精度(μm)：0.45-100
接口形式：220,222/翅,226/翅,螺纹

Filter material: 304 and 316L stainless steel
Size:Outer diameterΦ60mm-Φ130mm, InnerΦ28mm、Φ30mm, Length10-40in
Maximum operating temperature:Maximum operating temperature200°C
Maximum pressure difference: ΔP≤0.6Mpa
Filter accuracy (um):0.45-100
Interface form:220,222/ fin type,226/ fin type,thread

