


空气净化产品 Air Filters

无隔板高效过滤器 MINI-Pleat HEPA Filter


效率(EN):H13 ~U17
 框材: 铝型材; 铝板; 镀锌铁; 不锈钢
 滤料: 超细玻璃纤维滤纸 (包含进口HV); PP聚丙烯滤纸
 温度(°C): < 70
 相对湿度 (%): 100
 可选厚度 (mm): 38 46 69 78 90 96 110 150

密封胶: PU双组分聚氨酯胶
 密封胶条: EVA, 聚氨酯发泡, EPDM
 分隔物: 热熔胶

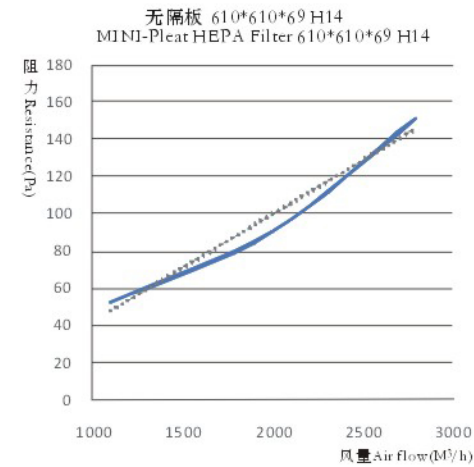

Efficiency(EN):H13~U17
 Frame: Aluminium profiles; aluminum plates; galvanized iron; stainless steel
 Filter: Ultra-fine fiberglass filter paper (including imported HV); PP polypropylene filter paper
 Temperature(°C): < 70
 Relative humidity(%): 100
 Optional thickness(mm): 38 46 69 78 90 96 110 150
 Sealant: PU two-component polyurethane glue
 Sealing strip: EVA, polyurethane foam, EPDM
 Separator: Hot melt


无隔板液槽式高效过滤器 Gel Sealing MINI-Pleat HEPA Filter

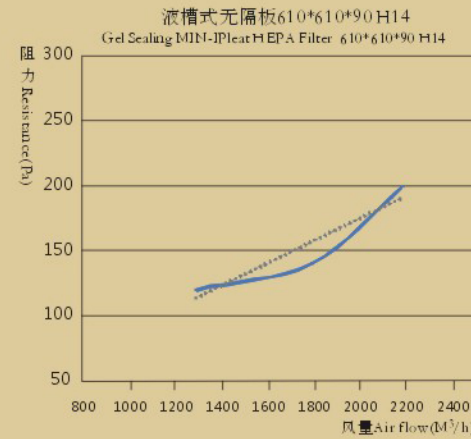

效率 (EN) : H13 ~U17
 框材: 铝型材
 滤料: 超细玻璃纤维滤纸 (包含进口HV)
 温度 (°C) : < 70
 相对湿度 (%) : 100
 可选厚度 (mm) : 69 75 90 93 104 117
 密封胶: PU双组分聚氨酯胶
 密封胶条: 液槽果冻胶
 分隔物: 热熔胶

Efficiency (EN) : H13~U17
 Frame : Aluminium profiles
 Filter : Ultra-fine fiberglass filter paper (including imported HV)
 Temperature (°C) : < 70
 Relative humidity (%) : 100
 Optional thickness (mm) : 69 75 90 93 104 117
 Sealant : PU two-component polyurethane glue
 Sealing strip : Imported liquid tank jelly glue
 Separator : Hot melt

注: 以上为常规尺寸, 可为客户提供任意规格尺寸及效率的产品; 以上数据偏差范围约±15%, 仅供参考。
 Note: The above is a regular size, can provide customers with any size and efficiency of the product; The above data deviation range is about 15%, for reference only.

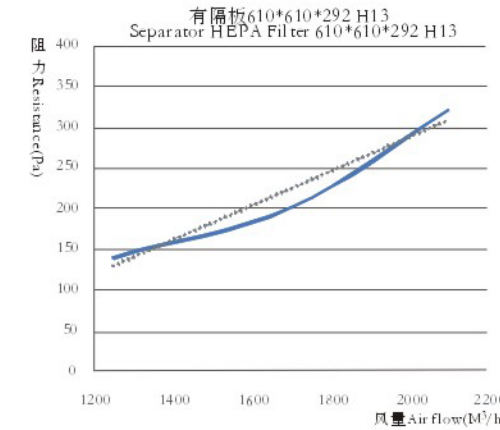

效率 (EN) : H10 ~H14
 框材: 铝型材; 铝板; 镀锌铁; 不锈钢
 滤料: 超细玻璃纤维滤纸 (包含进口HV); PP聚丙烯滤纸
 温度 (°C) : 胶版纸 < 50; 铝箔 < 100
 相对湿度 (%) : 100
 可选厚度 (mm) : 80 96 120 150 220 292
 密封胶: PU双组分聚氨酯胶
 密封胶条: EVA, 聚氨酯发泡, EPDM
 分隔物: 胶版纸; 铝箔

有隔板高效过滤器 Separator HEPA Filter


Efficiency (EN) : H10~H14
 Frame : Aluminium profiles; aluminum plates; galvanized iron; stainless steel
 Filter : Ultra-fine fiberglass filter paper (including imported HV); PP polypropylene filter paper
 Temperature (°C) : Paper < 50; Aluminum foil < 100
 Relative humidity (%) : 100
 Optional thickness (mm) : 80 96 120 150 220 292
 Sealant : PU two-component polyurethane glue
 Sealing strip : EVA, polyurethane foam, EPDM
 Separator : Adhesive paper; Aluminum foil



有隔板耐高温高效过滤器 High-Temperature and HEPA with partition

效率 (EN) : H13~H14
 框材: 铝型材; 不锈钢
 滤料: 耐高温防潮超细玻璃纤维滤纸
 温度 (°C) : ≤ 250
 相对湿度 (%) : 100
 可选厚度 (mm) : 80 96 120 150 220 292
 密封胶: 红色硅胶260°C; 陶瓷胶350°C
 密封胶条: 红色耐高温硅胶条
 分隔物: 铝箔

Efficiency (EN) : H13~H14
 Frame : Aluminium profiles; stainless steel
 Filter : Temperature-resistant moisture-resistant ultra-fine fiber glass fiber filter paper
 Temperature (°C) : ≤ 250
 Relative humidity (%) : 100
 Optional thickness (mm) : 80 96 120 150 220 292
 Sealant : Red silicone 260°C; Ceramic glue 350°C
 Sealing strip : Red high-temperature silicone strip
 Separator : Aluminum foil

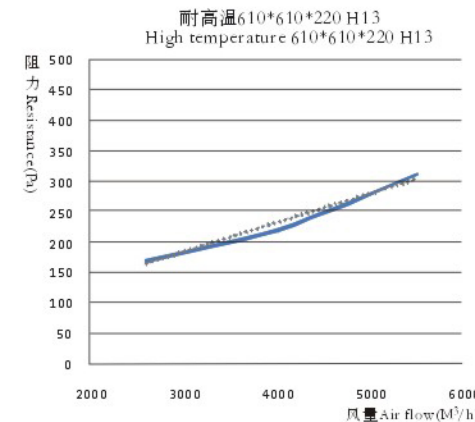

注: 以上为常规尺寸, 可为客户提供任意规格尺寸及效率的产品; 以上数据偏差范围约±15%, 仅供参考。
 Note: The above is a regular size, can provide customers with any size and efficiency of the product; The above data deviation range is about 15%, for reference only.